

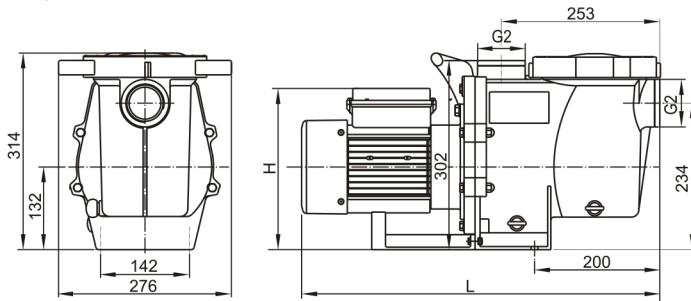


安装外形图 Overall dimension

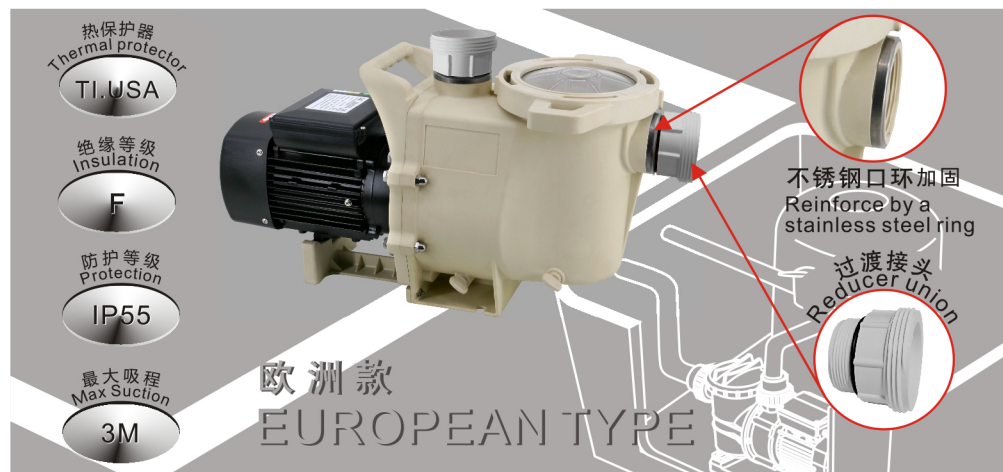

型号 Model	L	H
SWPB075	572	243
SWPB100		
SWPB120		
SWPB150		
SWPB200		
SWPB250	619	246
SWPB300		258
SWPB300		264
SWPA150-I		255
SWPA200-I		267
SWPA250-I		267
SWPA300-I		267
SWPA400-I		267
SWPA150-II	605	258
SWPA200-II		258
SWPA250-II		270
SWPA300-II		270

性能曲线 Performance curves

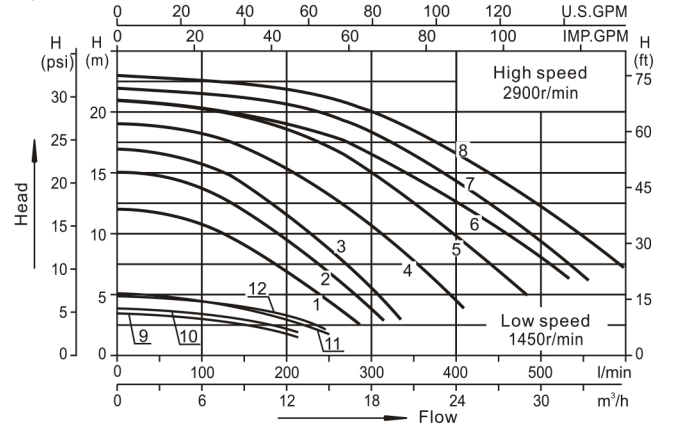

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 (curves)	输入功率 Power(P ₁) kW HP	电压/频率 V/Hz	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
SWPB075	285	12	1	0.55 0.75	220-240/50	3.2	60.3or63	14.6	645×295×400
SWPB100	315	15	2	0.75 1.0	220-240/50	3.8	60.3or63	15.5	645×295×400
SWPB120	335	17	3	0.9 1.2	220-240/50	4.6	60.3or63	16.3	645×295×400
SWPB150	400	19	4	1.1 1.5	220-240/50	5.2	60.3or63	17.3	645×295×400
SWPB200	480	21	5	1.5 2.0	220-240/50	7.0	60.3or63	18.3	645×295×400
SWPB250	530	21	6	1.85 2.5	220-240/50	8.6	60.3or63	20.4	645×295×400
SWPB300	550	22	7	2.2 3.0	220-240/50	10	60.3or63	21.6	645×295×400
SWPA150-I	400	19	4	1.1 1.5	220-240/50	5.2	60.3or63	18.6	680×295×400
SWPA200-I	480	21	5	1.5 2.0	220-240/50	7.0	60.3or63	19.7	680×295×400
SWPA250-I	530	21	6	1.85 2.5	220-240/50	8.6	60.3or63	21	680×295×400
SWPA300-I	550	22	7	2.2 3.0	220-240/50	10	60.3or63	22.6	680×295×400
SWPA400-I	600	23	8	3.0 4.0	220-240/50	14	60.3or63	24.3	680×295×400
SWPA150-II	400	19	4	(High speed) 1.1 1.5	220-240/50	5.2	60.3or63	20	680×295×400
	200	4	9	(Low speed) 0.3 3/8		2.2			
SWPA200-II	480	21	5	(High speed) 1.5 2.0	220-240/50	7.0	60.3or63	21	680×295×400
	215	4.5	10	(Low speed) 0.35 3/8		2.4			
SWPA250-II	530	21	6	(High speed) 1.85 2.5	220-240/50	8.6	60.3or63	22.5	680×295×400
	230	5	11	(Low speed) 0.4 1/2		2.8			
SWPA300-II	550	22	7	(High speed) 2.2 3.0	220-240/50	10	60.3or63	24.5	680×295×400
	250	5.5	12	(Low speed) 0.45 5/8		3.2			

特点

- * 此系列产品是我司参考市场上使用的习惯尺寸后，完全独立开发的；
- * 进出水口用不锈钢口环加固；
- * 一体式提手，安装便捷。

Features

- * This series product is us completely independent development, the overall size is reference to the market habit.
- * Inlet and outlet be reinforce by a stainless steel ring;
- * Integral structure handle, convenient installation.

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

