


安装外形图 Overall dimension





型号 Model	L
SFP075	550
SFP100	
SFP120	
SFP150	
SFP200	572
SFP250	
SFP300	586

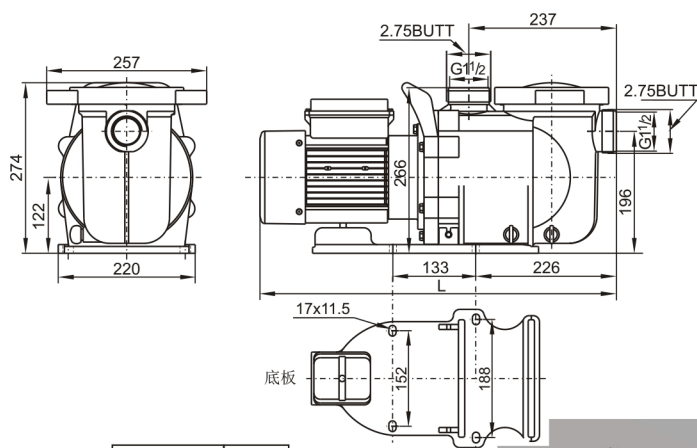

泳池循环过滤
Recirculation of water in
swimming pool equipment

性能曲线 Performance curves

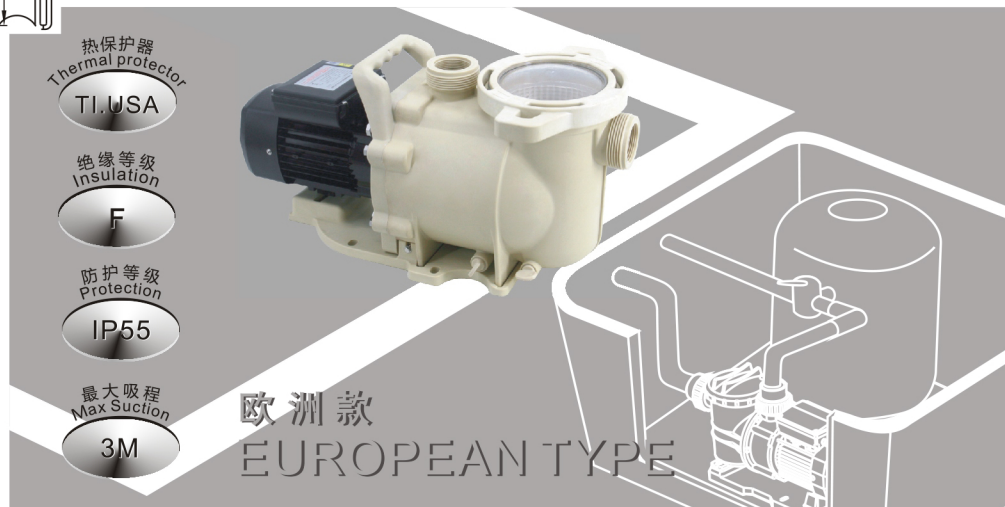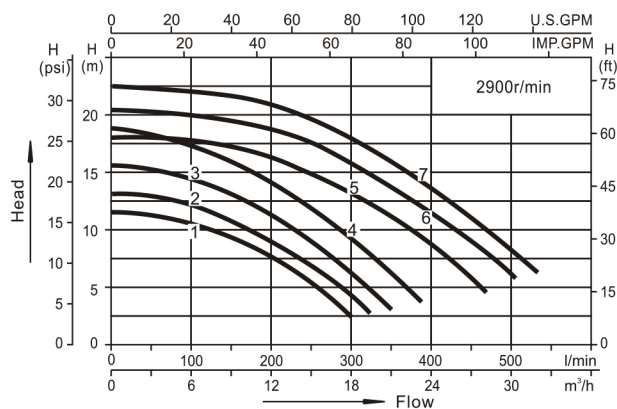

技术参数列表 Technical parameter list

型号 Model	最大流量 Q _{max} (l/min)	最大扬程 H _{max} (m)	曲线 (curves)	输入功率 Power(P ₁)		电压/频率 V/Hz	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP					
SFP075	300	11.5	1	0.55	0.75	220-240/50	3.2	48.5or50	13.2	610×265×355
SFP100	320	13.5	2	0.75	1.0	220-240/50	3.8	48.5or50	13.8	610×265×355
SFP120	350	15.5	3	0.9	1.2	220-240/50	4.6	48.5or50	14.5	610×265×355
SFP150	390	19	4	1.1	1.5	220-240/50	5.8	48.5or50	15	610×265×355
SFP200	470	18	5	1.5	2.0	220-240/50	7.0	48.5or50	17.2	640×265×355
SFP250	500	20.5	6	1.85	2.5	220-240/50	8.6	48.5or50	19	640×265×355
SFP300	530	22.5	7	2.2	3.0	220-240/50	10	48.5or50	20	640×265×355

特点

- * 此系列产品是我司参考市场上使用的习惯尺寸后，完全独立开发的；
- * 一体式提手，安装便捷。

Features

- * This series product is us completely independent development, the overall size is reference to the market habit.
- * Integral structure handle, convenient installation.

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

