


安装外形图 Overall dimension




型号 Model	L
SLP300T	800
SLP400T	
SLP500T	857
SLP750T	
SLP1000T	

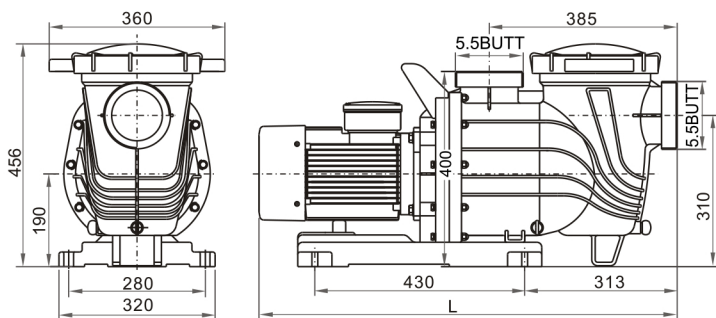

泳池循环过滤
Recirculation of water in swimming pool equipment

性能曲线 Performance curves

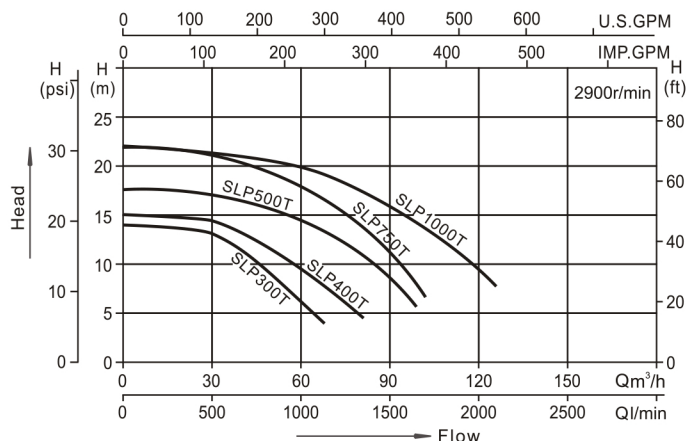

特点

1. 标配一体式塑料安装底板。
2. 配置高效电机，高效节能，使用寿命长。
3. 可在75℃介质条件下长期安全运行，适用于天然温泉水循环。
4. 适用于大型水上世界、海洋馆，大型游泳池等水循环过滤系统。

Feature

1. Unitary plastic installation baseboard.
2. High efficient motor, Energy saving, Long durability.
3. Long safety operation under 75℃ medium; Applicable to natural Hot Spring water circulation.
4. Compatible large water world, aquarium and large swimming pool.

工作条件


介质温度: 0~75℃
环境温度: ≤+50℃
最大工作压力: 0.7MPa

Working conditions

Medium temperature: 0~75℃
Environmental temperature: ≤+50℃
Max. Working pressure: 0.7MPa

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (L/min)	最大扬程 Hmax (m)	输入功率 Power(P ₁)		电压/频率 (V/Hz)	电流 (Amps)	接头尺寸 Fitting size(mm)		包装尺码 Packing size (mm)
			kW	HP			3"	4"	
SLP300T	1080	14	2.2	3	380/50	4.1	88.9 90	110 114.3	840×395×600
SLP400T	1300	15	3.0	4	380/50	5.2			840×395×600
SLP500T	1580	17	4.0	5	380/50	8.2			930×395×600
SLP750T	1700	22	5.5	7.5	380/50	9.6			930×395×600
SLP1000T	2100	21.5	7.5	10	380/50	11.1			930×395×600

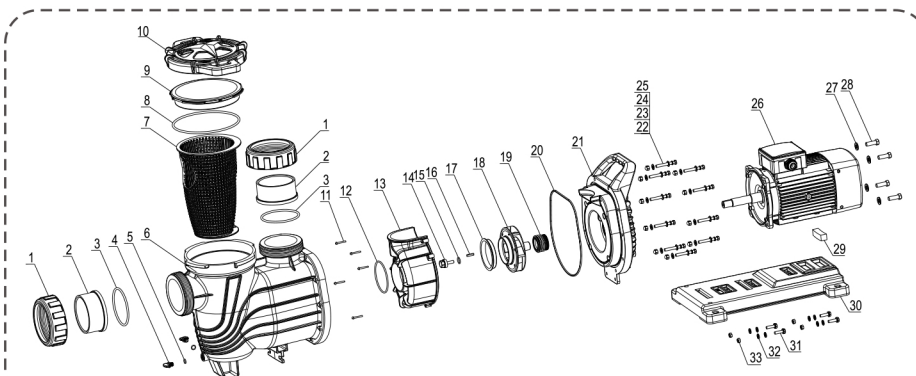

序号 NO.	名称 Name	序号 NO.	名称 Name	序号 NO.	名称 Name	序号 NO.	名称 Name
1	接头螺母 Tie-in nut	9	透视盖 Transparent cover	15	O形圈 O-Ring	24	盖形螺母 Acorn nut
2	接头 Tie-in	10	透视盖压盖 Gland cover of transparent cover	16	普通平键 Flat key	25	六角头螺栓 Hexagon bolt
3	O形圈 O-Ring	11	十字槽盘头螺钉 Cross recessed pan head screws	17	活动口环 Activities Rings	26	电机 Motor
4	螺塞 Plug	12	O形圈 O-Ring	18	叶轮 Impeller	27	平垫圈 Washer
5	O形圈 O-Ring	13	蜗壳 Volute	19	机械密封 Mechanical Seal	28	六角头螺栓 Hexagon bolt
6	泵壳 Pump Casing	14	叶轮螺母 Impeller Nut	20	密封垫圈 Gasket	29	底板胶垫 Floor rubber nat
7	滤盖 Filter			21	泵盖 Pump cover	30	底板 Base
8	O形圈 O-Ring			22	弹簧垫圈 Spring washer	31	六角头螺栓 Hexagon bolt
				23	平垫圈 Washer	32	平垫圈 Washer
						33	六角螺母 Hexagon nut